



Hoods

Silent, efficient, modern and constructed using satin finish stainless steel, the same material comprising the cooker hobs and sinks. A Foster coordinated appliance enables you to express your style in every detail.

Modular p. 318



Cloud p. 320



Sky p. 322



Ghost p. 324



S4000 p. 326



S4000 Mirror p. 328



Maya p. 330



KE Mirror p. 332



Master p. 334



Q p. 336



Q inox p. 338



Cilindro p. 340




KS Lux p. 342



KS 90 p. 344



Pitagora p. 345



Garage p. 346



Wing p. 348



Flat p. 350



Flat inox p. 351



Silent power

Power and quietness are the two principal features of a cooker hood, even though they are often in contrast with one-another. The continuous strive for the best compromise is however nowadays able to achieve surprising results. All the Foster solutions have an outstanding suction power which makes them efficient and well-performing in all conditions of use, both in extracting and filtering modes. All this is achieved quietly, thanks to motors and aerodynamic solutions carefully studied to reduce the acoustic impact to a minimum.




High performance motors

The motors of the S4000 hoods have a high suction capacity, topping the 1000 m³/h. Their refined design hides a powerful appliance with professional features.

Silent System motors

The new Silent System motors sport a very high efficiency leading to top suction-power coupled with reduced consumption and a noise-level 10 times lower compared to standard solutions.

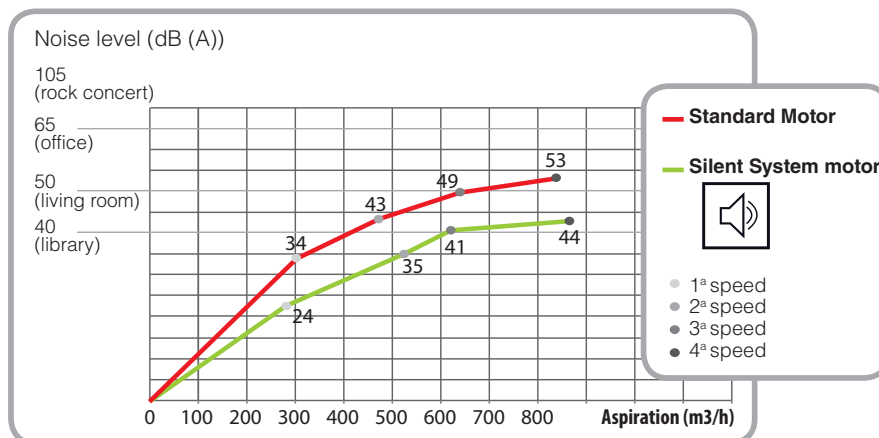

A hood for every kitchen

A really complete range, with every kind of hood. Not only different looks, but also different functioning principles, in order to be able to choose the hood which fits each one's needs.



Wall-mount hoods

A large range of choices in size, shape, materials and functionality.



Island hoods

For many models an island version is also available. These hoods are easy to install thanks to the telescopic chimneys.



Ceiling-mount suction systems

These are not mere hoods for aspiring cooking fumes, but complete ventilation systems, engineered to improve the quality of the air and the comfort of your living space.



Table hoods

Elegant and minimalistic solutions which perfectly match the Domino and In-line cooker hobs, both gas and induction.



Built-in hoods

These special solutions are craftily studied to disappear within the kitchen cabinets, nevertheless maintaining their own personality and great functionality.



Custom-made hoods

Foster specialises in tailor-made solutions. As for the worktops, also for the hoods Foster is able to manufacture custom-made products according to the customer's drawing, always guaranteeing the best match between worktop and cooker hood, in terms both of design and kind and finish of steel (a preliminary analysis, study and approval of the project is necessary).

Filters

All the Foster hoods are, in their original configuration, suction hoods, and are equipped with grease, beehive, multilayer, anodized aluminium filters. Wherever it is not possible to install a suction hood, the addition of active carbon filters (available as accessory) can transform the hood in “filtering” hood.




Remark: the grease filters can periodically be washed in the dishwasher in order to bring them back to their original filtering efficiency. It is however recommended to use a low-temperature programme (max. 40° C) to avoid any deformation and colour-change of the aluminium surfaces.



Stainless steel filters

In many models, especially the ones where the filter is in plain sight, the aluminium filtering element is covered in stainless steel. This solution improves the look and increases the durability of the product.



Standard stainless steel filter

It guarantees an excellent filtering function, thanks to the double stainless steel filtering layer, and as many as five layers of aluminium beehive structure.



Hi-class stainless steel filter

It features a peculiar and elegant look, as well as an heightened filtering power due to the seven-layer structure.




Perimeter suction

The perimeter suction is a feature common to many Foster hoods. The filters are hidden by steel- or crystal plates and the suction occurs along their perimeter. This has aesthetic advantages but also functional ones: the cleaning is easier, the suction power and noise-level are improved. The depression which occurs in the perimeter area facilitates in fact the suction of the particles composing the fumes.



Balanced suction system

This feature, exclusively available on Foster hoods, improves the suction uniformity on the whole surface, thanks to a specific, irregular perforation pattern that compensates the loss of suction power in the terminal tracts. It is particularly efficient in the island hoods and in the wall hoods of large size (120 cm).

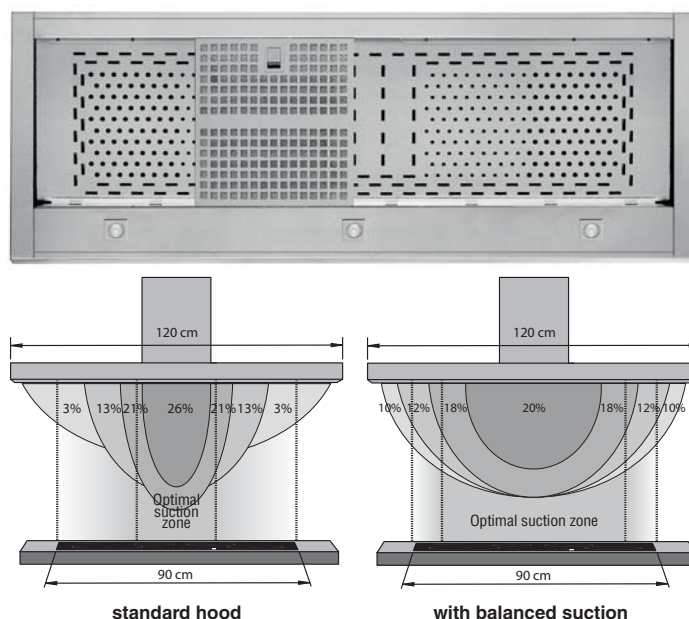



Lighting

The Foster hoods have different lighting systems, all intended to create a comfortable and safe illumination of the cooking space, with a keen eye on energy saving.



LED lighting

Many Foster hoods feature a LED lighting system, with 10 times less power consumption and 10 times more durability. The LED lighting furthermore makes a very comfortable and efficient light.



Neon lighting

The Ghost table hood is equipped with a neon lighting system that ensures an homogeneous and extended illuminated area even though the light source is close to the cooker hob.



Halogen lighting

For a more powerful lighting of the cooking area. The halogen spotlights are equipped with a push-pull opening mechanism that makes it possible to replace the lamp in a quick and easy way.



Low-consumption lighting

The ceiling suction systems are intended to be the main lighting source of the kitchen. The Modular system therefore features low-consumption lamps, which guarantee a long life and a considerable energy saving.

Digital control

Almost all Foster hoods are equipped with advanced electronic controls that allow a perfect control and improve the efficiency of the engines. The different solutions favor the aesthetic or functional aspect with additional functions such as digital thermometer and the timer, always useful for keep control of your preparations.



Remote control

The ceiling suction systems and the Maya hoods are equipped with a remote control to easily activate all their functions from any position.



Easy



Advance



Minimal



Touch

Special functions



Auto Mode function

With the Auto function the hood has temperature sensors and it can automatically set the suction power according to the heat developed by the cooker hob underneath.



Off-Timer

All the models with electronic interface can be programmed to turn off the suction at a postponed moment, so as to prolong the aeration of the room even after the cooking has been completed.



Rear exit mode

The motor can be rotated by 90°. In consequence the air outlet can be directed towards the back, the classical solution, but also toward the wall, with direct exit towards a specifically foreseen duct. With this kind of installation the chimney is therefore no longer necessary and is, in consequence, supplied as an option.




Filter-cleaning alarm

This function keeps track of the hours of use of the hood and signals the need to wash the filters in order to maintain the perfect efficiency of the hood.



Safe&Clean system

The Safe&Clean system features a stainless steel panel installed between the hood's filters and motor. The panel constitutes a flat and easy-to-clean surface, it improves the suction homogeneity on the whole surface and is also an efficient safety system because it prevents the fan and electronic parts from being easily accessible.



Accessories

Silencing kit

It consists of a sound-absorbing, highly flexible and extendable tube, which can reduce the noise-level of the hood by as much as 7 dB(A). It also functions as thermal insulation. It is available as accessory for all the hoods in suction mode, with 120 and 150 mm diameter.




cod. 9700 602
silencing kit 10 mt ø 120 mm

cod. 9700 603
silencing kit 10 mt ø 150 mm


Intake manifolds for ceiling systems

These make it possible to channel the various possible configurations of the ceiling suction systems into a single pipe.




code 2525 000

intake manifold for 4 pipes ø 120 mm




code 2523 000

intake manifold for 2 pipes ø 120 mm




code 2524 000

intake manifold for 3 pipes ø 120 mm




code 2526 000

intake manifold for 2 pipes ø 150 mm

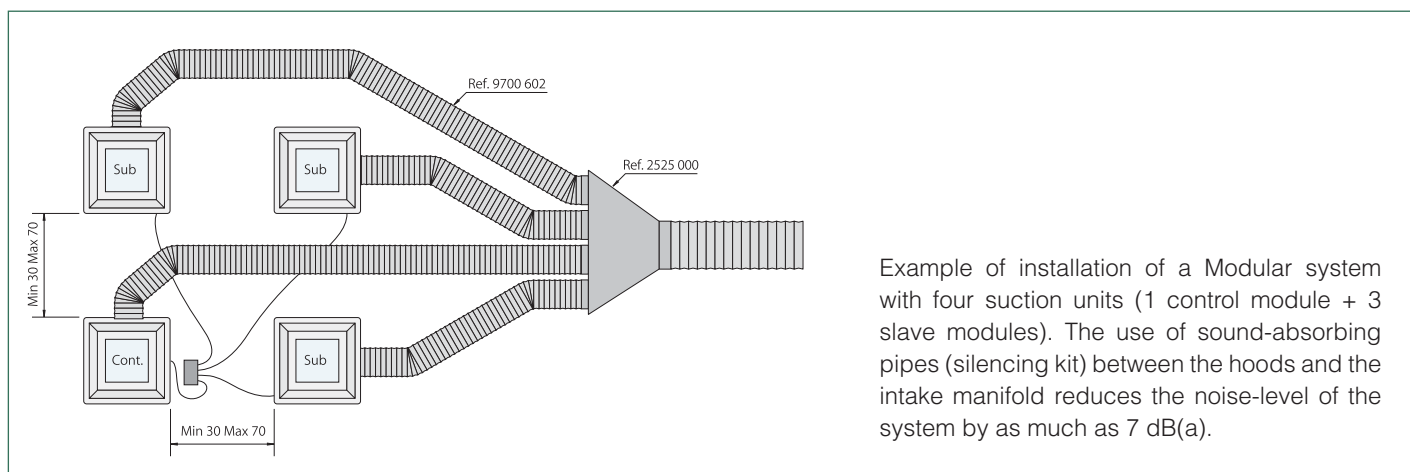

Choice suggestions

The correct choice of power and kind of installation are important in order to achieve good performances, efficiency, noise-level and consumption. In order to avoid possible mistakes when buying, we list hereafter some suggestions to make the choice easier.

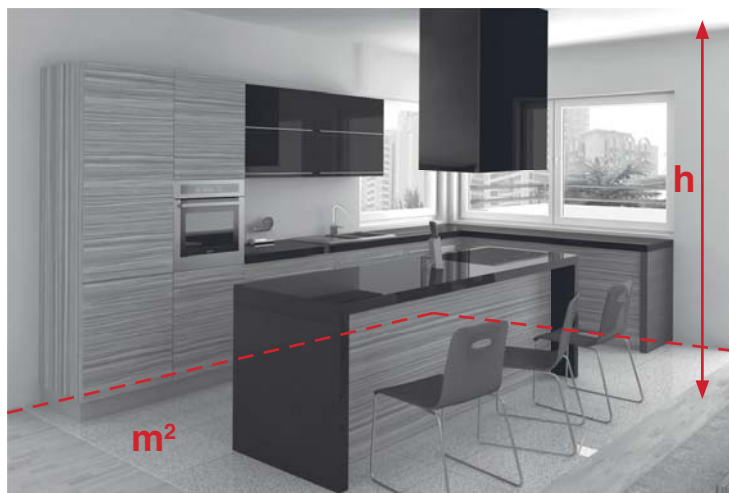



Choice of the flow capacity

The suction power of the hood must be correctly dimensioned compared to the volume of the room in which it is installed, in order to ensure a correct air circulation. The optimal air flow can be calculated by multiplying the volume of the room by 12 (number of complete air volume replacements in one hour). For ceiling suction systems it is recommended to calculate an air replacement of 15 cycles/hour.

$$\begin{array}{c}
 \boxed{\text{m}^2} \quad \text{Kitchen area} \quad \times \quad \boxed{h} \quad \text{Kitchen height} \quad \times \quad \boxed{12} \quad \text{Number of complete air replacements per hour} \\
 = \\
 \boxed{\text{m}^3/\text{h}} \\
 \text{Air flow (necessary suction power)}
 \end{array}$$

Positioning on the cooker hob

The optimal height above the cooker hob is 65 cm and anyway comprised between 60 and 70 cm. For wall hoods with inclined suction surface, this height is determined starting from the median point of the filtering area.

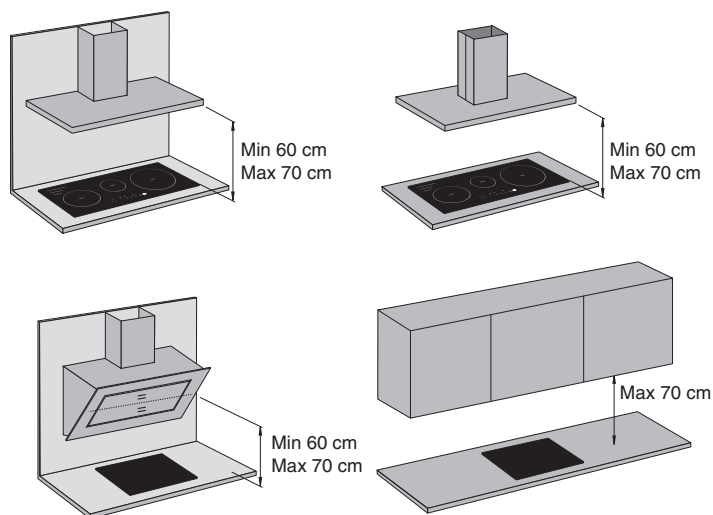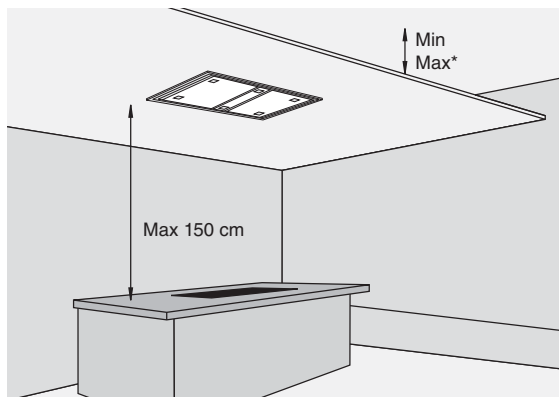

For the ceiling systems a ceiling-panelling height of maximum 150 cm from the cooker hob is recommended. The fixing systems of the hood makes it possible to regulate the distance between ceiling and panelling, based on specific needs. *See min. and max. dimensions for each specific model.

Width of hood


The dimension of the hood must be adapted to the size of the cooker hob underneath. A slightly larger hood compared to the hob will ensure an optimized suction.

Placement of pipelines

It is advisable to foresee exiting air ducts as straight as possible, without bends or corners. A tortuous exit-duct will determine a loss of suction power and therefore a less-than-optimal performance. Moreover, it is important not to connect the air exit-duct with chimneys of other appliances or heating boilers.

Air currents

In order for the hood to perform efficiently it is important to position it in a place not subject to air streams.

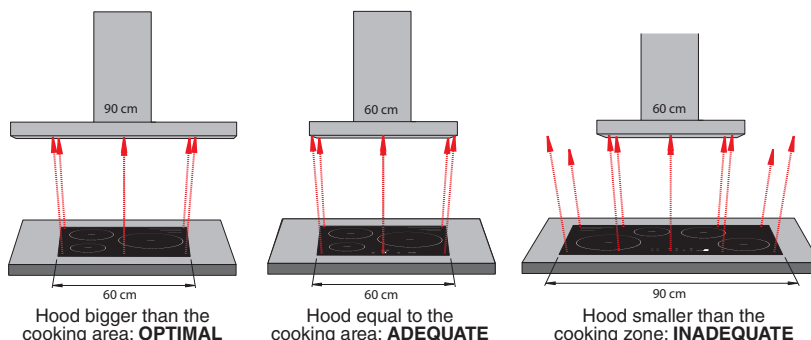

Modular



Modular is a ceiling modular system **providing air recirculation and an efficient lighting** for the whole kitchen. The three different modules: Control (master suction/lighting unit), Subordinate (slave suction/lighting unit) and Light (lighting unit) can be combined in an extremely flexible way, according to the room's requirements.

Modular NEW

Modular

ceiling modular suction system

The Control module (which is necessary) can control up to three Subordinate modules (for a total of maximum 4 suction units). The Light modules can be added to the system without limitation of number.



model	EAN	code
modular control	8051566437542	2518 000
modular subordinate	8051566437559	2519 000
modular light	8051566437566	2520 000



Modular Control & Subordinate

Finish:

satin stainless steel - white glass


1 grease filter

4 speeds

Low consumption lighting

Perimetric aspiration

Automatic delayed shutdown



Remote control included in Modular Control model only

Air flow rate: **600 m³/h**

Air exhaust hole: Ø 120 mm

Motor power: 140 W

Suspended ceiling height: min 220 mm / max 310 mm




Modular light

Finish:

satin stainless steel - white glass

Low consumption lighting

Suspended ceiling height: min 220 mm / max 310 mm



"Filtering mode" option not available for this model.

accessories

	EAN	code
silencing kit Ø 120	8051566437658	9700 602
intake manifold for 2 pipes - in Ø120 / out Ø150 mm	8051566437610	2523 000
intake manifold for 3 pipes - in Ø120 / out Ø200 mm	8051566437627	2524 000
intake manifold for 4 pipes - in Ø120 / out Ø200 mm	8051566437634	2525 000

Cloud



Not a mere hood, but **a suction system capable of maintaining a high quality of the air** for the whole day. Cloud is also an efficient lighting system and an elegant decorative element for the ceiling of your kitchen.

Cloud NEW

Cloud 90

ceiling suction hood



Finish:

satin stainless steel - white glass**Remote control included**

2 grease filters

4 speeds

Halogen illumination 4x20 W

Perimetric aspiration

Automatic delayed shutdown

Air flow rate: **1200 m³/h**

Air exhaust hole: Ø 120 mm (x2)


Motor power: 280 W

Suspended ceiling height: min 200 mm / max 300 mm

“Filtering mode” option not available for this model.

accessories

	EAN	code
silencing kit Ø 120	8051566437658	9700 602
intake manifold for 2 pipes - in Ø120 / out Ø150 mm	8051566437610	2523 000

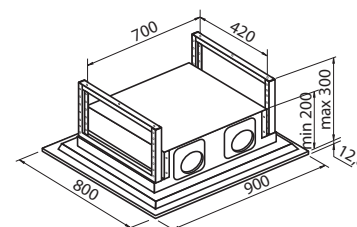

Cloud 130

ceiling suction hood



Finish:

satin stainless steel - white glass**Remote control included**

2 grease filters

4 speeds

Halogen illumination 6x20 W

Perimetric aspiration

Automatic delayed shutdown

Air flow rate: **1720 m³/h**

Air exhaust hole: Ø 150 mm (x2)


Motor power: 320 W

Suspended ceiling height: min 270 mm / max 420 mm

“Filtering mode” option not available for this model.

accessories

	EAN	code
silencing kit Ø 150	8051566437665	9700 603
intake manifold for 2 pipes - in Ø150 / out Ø200 mm	8051566437641	2526 000

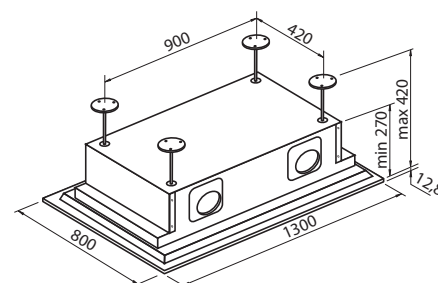

Sky



Not a mere hood, but **a suction system capable of maintaining a high quality of the air** for the whole day. Sky is completely made of stainless steel and will give a refined professional touch to your kitchen.

Sky 90

ceiling suction hood



Finish:

satin stainless steel

Remote control included

2 grease filters

4 speeds

LED illumination

Perimetric aspiration

Automatic delayed shutdown

Air flow rate: **1200 m³/h**

Air exhaust hole: Ø 120 mm (x2)

Motor power: 280 W


Suspended ceiling height: min 200 mm / max 300 mm

model	EAN	code
90 cm	8051566437597	2522 090

“Filtering mode” option not available for this model.


accessories

	EAN	code
silencing kit Ø 120	8051566437658	9700 602
intake manifold for 2 pipes - in Ø120 / out Ø150 mm	8051566437610	2523 000

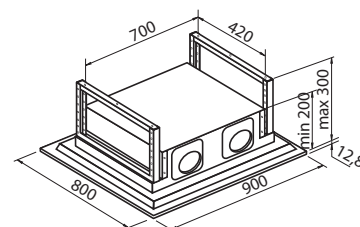

Sky 130

ceiling suction hood



Finish:

satin stainless steel

Remote control included

2 grease filters

4 speeds

LED illumination

Perimetric aspiration

Automatic delayed shutdown

Air flow rate: **1720 m³/h**

Air exhaust hole: Ø 150 mm (x2)

Motor power: 320 W


Suspended ceiling height: min 270 mm / max 420 mm

model	EAN	code
130 cm	8051566437603	2522 130

“Filtering mode” option not available for this model.

accessories

	EAN	code
silencing kit Ø 150	8051566437665	9700 603
intake manifold for 2 pipes - in Ø150 / out Ø200 mm	8051566437641	2526 000

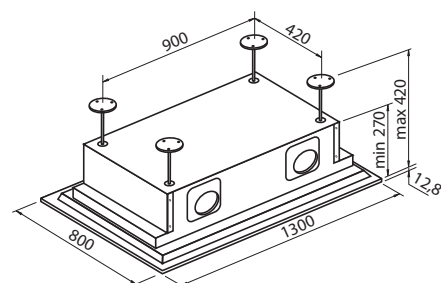





Ghost






Receding completely into the worktop, the Ghost hoods **combine functionality and performance with an essential and classy design.**

The 120 version has been engineered for a perfect matching with the many in-line solutions of Foster, both gas and induction. The Domino version perfectly completes the S4000 Domino cooking range.

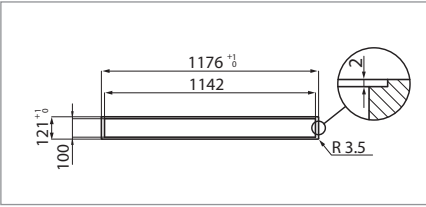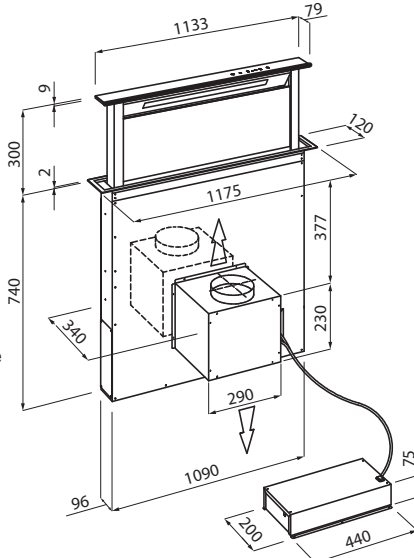
Ghost

<div> <div>FT</div> <div>FTS</div> </div> <div> Ghost 120 Filotop flush-mount table hood </div>		model	EAN	code	
<div>  </div> <div>  </div> <div> Cut-out for flush mount installation  </div>		120 FT	8051566430802	2451 120	<div> Finish: satin stainless steel - black glass Touch control 2 grease filters 4 speeds Neon illumination Automatic delayed shutdown Optional filtering operation mode Air flow rate: 960 m³/h Height from floor: 300 mm Dimensions on the worktop: 1175x120 mm Cut-out: - on-top built-in: 1142x100 mm - flush-mount built-in: see drawing beside Air exhaust hole: Ø 120/150 mm Motor power: 300 W </div> <div>  </div>
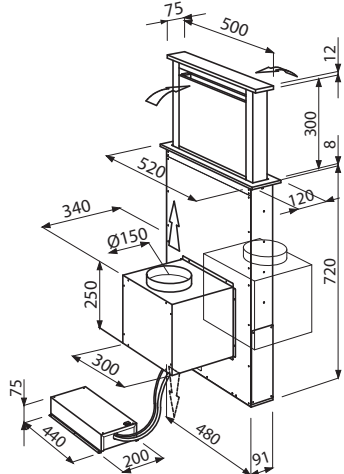
<div> <div>Q4</div> </div> <div> S4000 Domino Ghost table-top hood </div>		model	EAN	code	
<div>  </div> <div>  </div>		Domino	8051566430666	2451 000	<div> Finish: satin stainless steel - black glass Touch control 1 grease filter 4 speeds Automatic delayed shutdown Optional filtering operation mode Air flow rate: 960 m³/h Adjustable height from table 180-300 mm Dimensions on the worktop: 520x120 mm Cut-out: 490x104 mm Air exhaust hole: Ø 120/150 mm Motor power: 300 W </div> <div>  </div>

accessories	EAN	code
kit 2 carbon filters	8051566436231	9700 460
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603
remote motor instal. kit	8051566437153	9700 459

The Ghost hoods offer a great easiness of installation: the motor can be positioned frontally, on the back of the hood or detached, by means of the specific optional kit (see drawing here next)

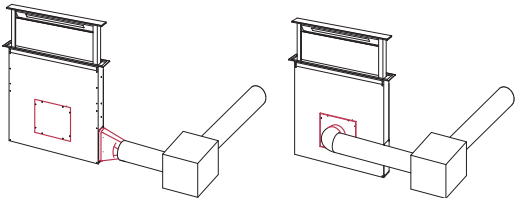

S4000



A classy touch.

The S4000 hoods are artifacts finished with precious details: filters with perimetric suction, Led lighting and the suction power of a professional hood. They are fully made of AISI304 stainless steel, with the same polishing as the Foster sinks and hobs, for a harmonious matching.

S4000

S4000 wall

wall-mounted linear suction hood with telescopic chimney



accessories

	EAN	code
carbon filter	8033524377343	9700 400
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model	EAN	code
90 cm	8033524375578	2440 090
120 cm	8033524375707	2440 120

Finish:

satin stainless steel

High performance Motor

Minimal electronic control

1 grease filter

4 speeds

LED illumination

hood 90 cm: 6 LED

hood 120 cm: 9 LED

Perimetric aspiration

Automatic delayed shutdown


Optional filtering operation mode

Air flow rate: **1000 m³/h**

Chimney height: 590 – 970 mm

Air exhaust hole: Ø 120/150 mm

Motor power: 320 W

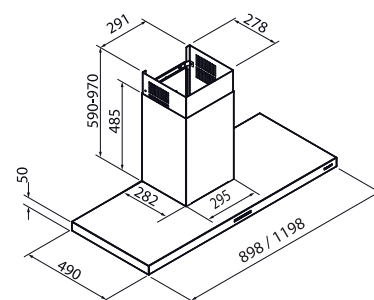

S4000 island

island suction hood with telescopic chimney



accessories

	EAN	code
carbon filter	8033524377343	9700 400
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model	EAN	code
90 cm	8033524375714	2442 090
120 cm	8033524375691	2442 120

Finish:

satin stainless steel

High performance Motor

Minimal electronic control

1 grease filter

4 speeds

LED illumination

hood 90 cm: 12 LED

hood 120 cm: 18 LED

Perimetric aspiration

Automatic delayed shutdown


Optional filtering operation mode

Air flow rate: **1000 m³/h**

Chimney height: 810 – 1220 mm

Air exhaust hole: Ø 120/150 mm

Motor power: 320 W

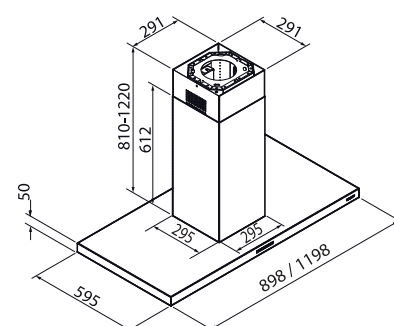

S4000 Mirror



Steel and dark glass, with its elegant bevelling, **are fused together in a unique design**, in perfect harmony with the S4000 ovens. A harmonious matching both with the stainless steel gas hobs and the black glass induction ones.

S4000 Mirror

S4000 Mirror Wing

wall-mounted linear suction hood with telescopic chimney



accessories

	EAN	code
carbon filter	8051566435623	9700 516
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model

EAN

code

Wing

8051566431052

2445 090

Finish:

satin stainless steel -
black tempered glass

Touch control

2 grease filters

4 speeds

LED illumination

Automode function

Automatic delayed shutdown

Optional filtering operation mode

Air flow rate: **700 m³/h**


Chimney height:

for suction mode 575 – 995 mm

for filtering mode 645 – 1065 mm

Air exhaust hole: Ø 120/150 mm

Motor power: 170 W

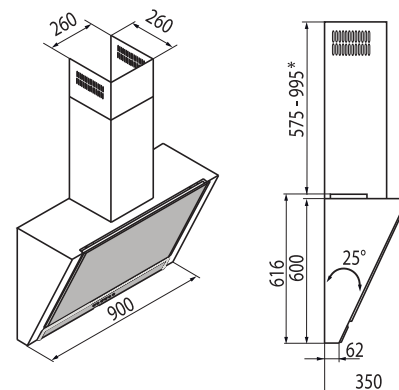

*chimney height in filtering mode is:
min 645 - max 1065

S4000 Mirror

wall-mounted linear suction hood with telescopic chimney



accessories

	EAN	code
carbon filter	8051566435616	9700 517
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model

EAN

code

90 cm

8051566431045

2444 090

120 cm

8051566431069

2444 120

Finish:

satin stainless steel -
black tempered glass

Touch control

Stainless steel grease filters

hood 90 cm: 3 filters

hood 120 cm: 4 filters

4 speeds

LED illumination

Automode function

Automatic delayed shutdown

Optional filtering operation mode

Air flow rate: **700 m³/h**


Chimney height:

for suction mode 580 – 1010 mm

for filtering mode 650 – 1080 mm

Air exhaust hole: Ø 120/150 mm

Motor power: 170 W



*chimney height in filtering mode is:
min 650 - max 1080

Maya




Maya sports an original design which is **easy to blend into the modern kitchen** where white surfaces are increasingly popular. But it is not only design. The two versions, for wall and island installation, are technologically advanced: motors with high performance, stainless steel filters, LED lighting and remote control are all present on these products.

Maya NEW

Maya 80 wall

wall-mounted linear suction hood with telescopic chimney



“Filtering mode” option not available for this model.

accessories	EAN	code
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model	EAN	code
hood body	8051566437160	2500 100
telescopic chimney kit*	8051566437955	2500 101

Finish:

satin stainless steel - white glass

Rear exit mode function

2 stainless steel grease filter

4 speeds


LED illumination (3 LED x 4,8 W)

Automatic delayed shutdown

Air flow rate: **860 m³/h**


Air exhaust hole: Ø 120/150 mm

Motor power: 160 W



Maya 64 island

island suction hood



“Filtering mode” option not available for this model.

accessories	EAN	code
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model	EAN	code
hood body	8051566437177	2501 100
chimney h 480 mm	8051566437962	2501 101
chimney h 610 mm	8051566437979	2501 102
chimney h 740 mm	8051566437986	2501 103
chimney h 990 mm	8051566437993	2501 104

Finish:

satin stainless steel - white glass

Remote control included

1 stainless steel grease filter

4 speeds


LED illumination (3 LED x 4,8 W)

Automatic delayed shutdown

Air flow rate: **860 m³/h**

Air exhaust hole: Ø 120/150 mm

Motor power: 160 W



KE mirror




White and black, more and more present in modern kitchens, become protagonists in these new hoods, and harmoniously complete the KE collection, perfectly matching with the KE and KE white hobs.

KE mirror NEW

KE mirror white

wall-mounted linear suction hood with telescopic chimney

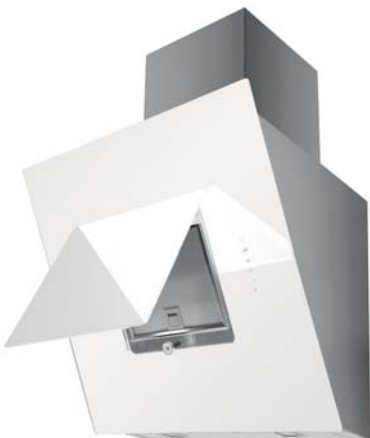

accessories

	EAN	code
carbon filters kit	8051566437689	9700 601
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model	EAN	code
70 cm	8051566437207	2503 170
90 cm	8051566437184	2503 190
telescopic chimney*	8051566438143	2503 000

* chimney kit not required for installations in filtering mode or with motor output turned towards the wall (rear exit mode)

Finish:

satin stainless steel -

white tempered glass

Touch control

1 grease filter

4 speeds

Halogen illumination: 2x20 W

Filter saturation warning light

Automatic delayed shutdown

Rear exit mode function


Optional filtering operation mode

Air flow rate: **800 m³/h**

Chimney height: 310 – 600 mm

Air exhaust hole: Ø 120/150 mm

Motor power: 200 W



KE mirror black

wall-mounted linear suction hood with telescopic chimney



accessories

	EAN	code
carbon filters kit	8051566437689	9700 601
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model	EAN	code
70 cm	8051566437214	2503 670
90 cm	8051566437191	2503 690
telescopic chimney*	8051566438143	2503 000

* chimney kit not required for installations in filtering mode or with motor output turned towards the wall (rear exit mode)

Finish:

satin stainless steel -

black tempered glass

Touch control

1 grease filter

4 speeds

Halogen illumination: 2x20 W

Filter saturation warning light

Automatic delayed shutdown

Rear exit mode function


Optional filtering operation mode

Air flow rate: **800 m³/h**

Chimney height: 310 – 600 mm

Air exhaust hole: Ø 120/150 mm

Motor power: 200 W



Master



Care for each detail and great functionality are the highlights of this collection, which is extremely rich of content. **Master is Foster's thinnest hood**, sporting an extremely refined body only 45 mm thick.

Master NEW

Master wall

wall-mounted linear suction hood with telescopic chimney



accessories

	EAN	code
carbon filter	8051566437672	9700 600
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model	EAN	code
90 cm	8051566437252	2505 090
120 cm	8051566437269	2505 120

Finish:

satin stainless steel

Advance Electronic control

Stainless steel grease filters

hood 90 cm: 3 filters

hood 120 cm: 4 filters

4 speeds

LED illumination

hood 90 cm: 2 LED

hood 120 cm: 3 LED

Balanced Aspiration System (BAS)

Filter saturation warning light

Automatic delayed shutdown

Timer and Thermometer display


Optional filtering operation mode

Air flow rate: **860 m³/h**

Chimney height: 540 – 970 mm

Air exhaust hole: Ø 120/150 mm

Motor power: 160 W

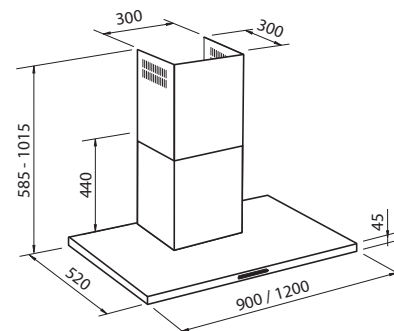

Master island

island suction hood with telescopic chimney



accessories

	EAN	code
carbon filter	8051566437672	9700 600
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model	EAN	code
120 cm	8051566437276	2506 120

Finish:

satin stainless steel

Advance Electronic control

4 Stainless steel grease filters

4 speeds

Illumination: 4 LED

Balanced Aspiration System (BAS)

Filter saturation warning light

Automatic delayed shutdown

Timer and Thermometer display


Optional filtering operation mode

Air flow rate: **860 m³/h**

Chimney height: 540 – 1140 mm

Air exhaust hole: Ø 120/150 mm

Motor power: 160 W

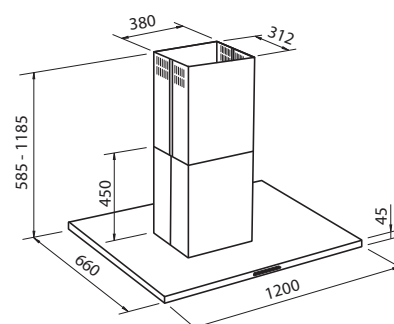

Q



Q Glass is **a solution with an eye-catching impact**, thought for a kitchen of daring design. The squared-out lines and the dominance of white or black glass make these hoods a perfect matching for the many induction solutions Foster proposes.

Q 90 wall

wall-mounted linear suction hood with telescopic chimney




“Filtering mode” option not available for this model.

accessories	EAN	code
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model	par n.	EAN	code
90 cm wall mounted white glass	hood body	8051566437290	2508 190
	white glass	8051566438006	2508 191
90 cm wall mounted black glass	hood body	8051566437306	2508 690
	black glass	8051566438013	2508 691

Finish:
tempered glass - satin stainless steel
Touch electronic control
3 Stainless steel grease filters
 4 speeds
 Halogen illumination (2x20 W)
 Automatic delayed shutdown

Air flow rate: **860 m³/h**
 Chimney height: 300 – 600 mm
 Air exhaust hole: Ø 120/150 mm
 Motor power: 160 W

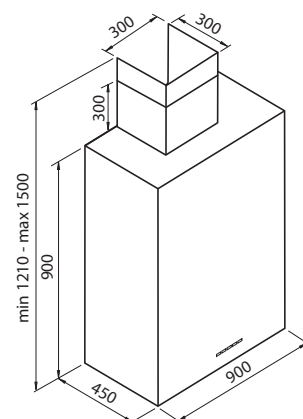

Q 90 island

island suction hood with telescopic chimney




“Filtering mode” option not available for this model.

accessories	EAN	code
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model	par n.	EAN	code
90 cm island white glass	hood body	8051566437313	2509 190
	white glass	8051566438020	2509 191
90 cm island black glass	hood body	8051566437320	2509 690
	black glass	8051566438037	2509 691

Finish:
tempered glass - satin stainless steel
Touch electronic control
3 Stainless steel grease filters
 4 speeds
 Halogen illumination (4x20 W)
 Automatic delayed shutdown

Air flow rate: **860 m³/h**
 Chimney height: 300 – 650 mm
 Air exhaust hole: Ø 120/150 mm
 Motor power: 160 W

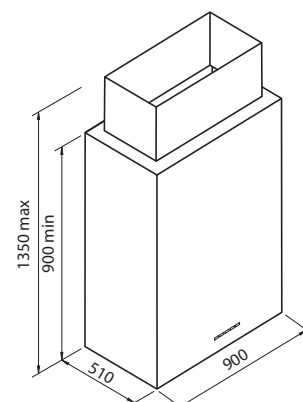

Q inox



Q Inox is **a hood with a highly professional bias**, due the massive presence of stainless steel; it is also a solution of refined design, thanks to its essential lines. It is the perfect matching for a stainless steel worktop.

Q inox NEW

Q inox wall


wall-mounted linear suction hood with telescopic chimney



model	EAN	code
60 cm	8051566437337	2510 060
90 cm	8051566437351	2510 090

Finish:
satin stainless steel
Easy electronic control
Stainless steel grease filters
hood 60 cm: 1 filter
hood 90 cm: 2 filters
4 speeds
Halogen illumination (2x20 W)
Automatic delayed shutdown
Optional filtering operation mode

Air flow rate: **800 m³/h**
Chimney height: 310 – 600 mm
Air exhaust hole: Ø 120/150 mm
Motor power: 200 W

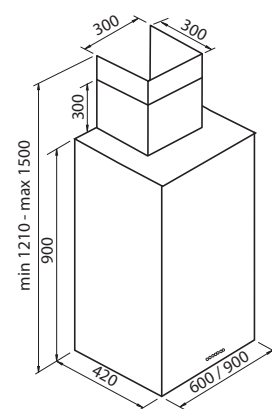

accessories

	EAN	code
carbon filter	8051566437672	9700 600
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

Q inox island


island suction hood with telescopic chimney



model	EAN	code
60 cm	8051566437344	2511 060
90 cm	8051566437368	2511 090

Finish:
satin stainless steel
Easy electronic control
Stainless steel grease filters
hood 60 cm: 1 filter
hood 90 cm: 2 filters
4 speeds
Halogen illumination (4x20 W)
Automatic delayed shutdown
Optional filtering operation mode

Air flow rate: **800 m³/h**
Chimney height: 200 – 700 mm
Air exhaust hole: Ø 120/150 mm
Motor power: 200 W

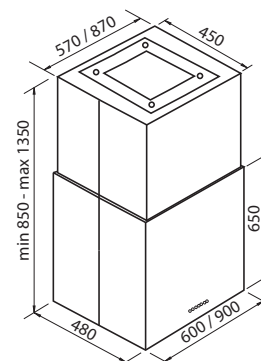

accessories

	EAN	code
carbon filter	8051566437672	9700 600
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603



These hoods have a minimal design, underlined by the great care for detail and the touch of originality given by the hexagonal filter. **A perfect match for the many round cooker hobs of our catalogue.**

Cilindro

NEW

Cilindro wall

wall-mounted linear suction hood

model

EAN

code

wall

8051566439157

2531 000



Finish:

satin stainless steel

Minimal electronic control

1 stainless steel grease filter

4 speeds

Illumination: 4 LED

Automatic delayed shutdown


Optional filtering operation mode

Air flow rate: **930 m³/h**

Height: 920 mm

Air exhaust hole: Ø 120/150 mm

Motor power: 320 W



accessories

EAN

code

carbon filter 8051566439416 9700 380

silencing kit Ø 120 8051566437658 9700 602

silencing kit Ø 150 8051566437665 9700 603

Cilindro island

telescopic island suction hood

model

EAN

code

island

8051566439164

2530 000



Finish:

satin stainless steel

Minimal electronic control

1 stainless steel grease filter

4 speeds

Illumination: 4 LED

Automatic delayed shutdown


Optional filtering operation mode

Air flow rate: **930 m³/h**

Height: 920 – 1330 mm

Air exhaust hole: Ø 120/150 mm

Motor power: 320 W

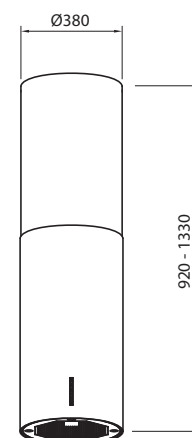

accessories

EAN

code

carbon filter 8051566439416 9700 380

silencing kit Ø 120 8051566437658 9700 602

silencing kit Ø 150 8051566437665 9700 603

KS Lux



The KS collection welcomes some new solutions, now revisited and improved in their functionality, standard configuration and sizes available for a better easiness of matching.

KS Lux NEW

KS Lux

wall-mounted linear suction hood with telescopic chimney



accessories

	EAN	code
carbon filter	8051566437672	9700 600
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model	EAN	code
80 cm	8051566437221	2504 080 80 cm
90 cm	8051566437238	2504 090 90 cm
120 cm	8051566437245	2504 120 120 cm

Finish:

satin stainless steel

Easy electronic control

Stainless steel grease filters

hood 80 cm: 2 filters

hood 90 cm: 3 filters

hood 120 cm: 4 filters

4 speeds

Halogen illumination

hood 80 cm: 2x20 W

hood 90 cm: 2x20 W

hood 120 cm: 3x20 W

Balanced Aspiration System (BAS)

Automatic delayed shutdown


Optional filtering operation mode

Air flow rate: **800 m³/h**

Chimney height: 540 – 970 mm

Air exhaust hole: Ø 120/150 mm



Motor power: 200 W

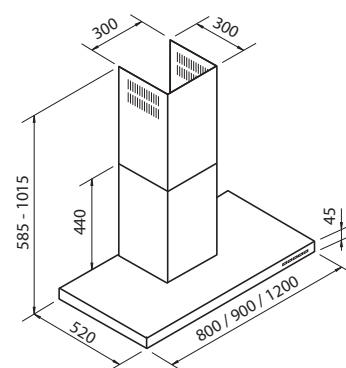

Balanced Aspiring System (BAS)



It is a unique Foster system that improves the uniformity of suction on the entire surface of the hood. It consists of a special irregular perforation which compensates for the loss of suction power in end sections and is particularly effective for stand-alone or wall-mounted hoods of considerable size (120 cm).

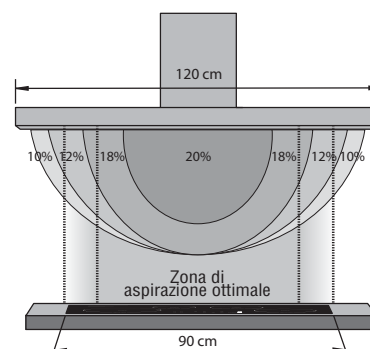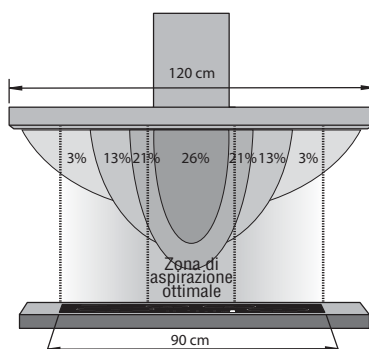

KS 90



Stainless steel is the protagonist of the KS collection. Hood, cooker hob and sink blend in with perfect harmony in a professional style of great personality and elegance.

KS 90

wall-mounted linear suction hood with telescopic chimney




Finish:
satin stainless steel
Mechanical push-button control
3 grease filters
3 speeds
Halogen illumination: 2x20 W
Optional filtering operation mode

Air flow rate: **550 m³/h**
Chimney height: 490 – 840 mm
Air exhaust hole: Ø 120/150 mm
Motor power: 220 W

EAN	code
8033524375660	2409 000

accessories

	EAN	code
carbon filter	8033524377367	9700 402
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

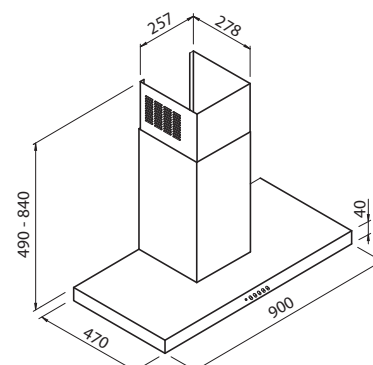

Pitagora



Pitagora is meant to be coupled with the corner hobs that **give new life to an area of the kitchen often neglected.**

Pitagora 90x90	EAN	code
corner suction hood with telescopic chimney section	8033524377916	2439 001




Finish:
satin stainless steel
Minimal electronic control
2 grease filters
4 speeds
Halogen illumination: 2x20 W
Automatic delayed shutdown
Optional filtering operation mode

Air flow rate: **850 m³/h**
Chimney height: 450 – 850 mm
Air exhaust hole: Ø 150 mm
Motor power: 250 W



accessories	EAN	code
carbon filter	8033524379941	9700 409
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603



Hoods

Garage







Garage is **an original built-in solution**. Available in several lengths and heights, it covers all the standard measures of the kitchen hanging cabinets. It is meant to be installed in place of the cabinet, so that only the kitchen door, coordinated with your kitchen design, is needed to perfectly blend this hood into any design.

Garage NEW

Garage

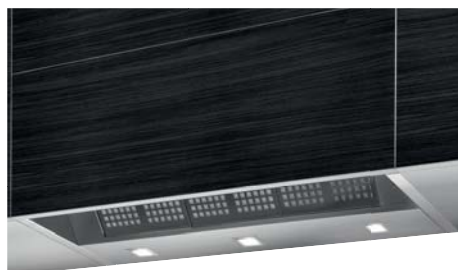fully-hidden wall suction hood



height	length	EAN	code
 36 cm	60 cm	8051566437474	2515 060
	90 cm	8051566437481	2515 090
	120 cm	8051566437498	2515 120
 48 cm	90 cm	8051566437504	2516 090
	120 cm	8051566437511	2516 120
 60 cm	90 cm	8051566437528	2517 090
	120 cm	8051566437535	2517 120

Finish: satin stainless steel

Easy electronic control

Stainless steel grease filters

hood 60 cm: 1 filter

hood 90 cm: 3 filters

hood 120 cm: 4 filters

4 speeds

Halogen illumination

hood 60 cm: 2x20 W

hood 90 cm: 2x20 W

hood 120 cm: 3x20 W

Automatic delayed shutdown


Blum hinge with soft-closing mechanism**Rear exit mode function**

Optional filtering operation mode

Air flow rate: **800 m³/h**

Air exhaust hole: Ø 120/150 mm

Motor power: 200 W

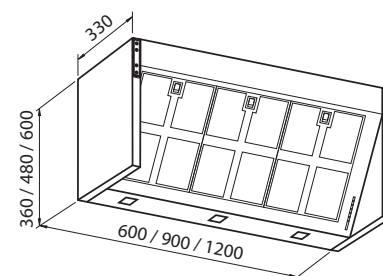

The hood is to be fixed to the wall. It is to be installed in place of the hanging cabinet.

accessories	EAN	code
carbon filters kit	8051566437689	9700 601
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

length \ height	60 cm	90 cm	120 cm
36 cm	4,2 ÷ 13,6 Kg	4,2 ÷ 13,6 Kg	8,9 ÷ 18,0 Kg
48 cm	-	3,2 ÷ 10,2 Kg	6,7 ÷ 18,0 Kg
60 cm	-	5,4 ÷ 15,0 Kg	5,4 ÷ 15,0 Kg

Garage hoods feature renowned amortized Blum hinges.

The chart aside shows min and max weights of the wing recommended for a proper functioning of the mechanism.



Wing



Wing is **a fully-hidden hood with a classy touch**, given by its front movable wing in acid-etched glass. Apart from its elegant and original look, the wing also has a functional use, as it improves the flow of cooking fumes towards the filters.

Wing

under-cabinet built-in suction hood



Finish: satin stainless steel / glass

Easy electronic control

Aluminium greese filters

hood 60 cm: 1 filter

hood 90 cm: 1 filter

hood 120 cm: 4 filters

4 speeds

Halogen illumination

hood 60 cm: 2x20 W

hood 90 cm: 3x20 W

hood 120 cm: 3x20 W

Automatic delayed shutdown

Perimetric aspiration

Stainless steel protection profiles for the hanging cabinets


Optional filtering operation mode

Air flow rate: **800 m³/h**


Air exhaust hole: Ø 120/150 mm

Motor power: 200 W

model	EAN	code
60 cm	8051566437375	2512 060
90 cm	8051566437382	2512 090
120 cm	8051566437399	2512 120

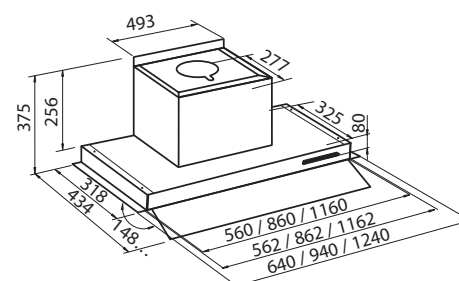

The hood is to be installed between the shoulders of the hanging cabinet, and fixed to the wall.

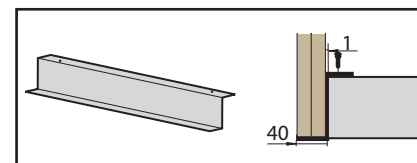

Stainless steel protection profiles for the hanging cabinets included.

accessories	EAN	code
carbon filters kit	8051566437689	9700 601
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

Flat



Flat is a **fully-hidden solution**, extremely elegant thanks to the minimal design of the perimetric suction and the refined lighting system with its LED strip. The versions in white or black glass and in stainless steel leave the maximum freedom of choice and matching.

Flat inox

under-cabinet built-in suction hood



	model	EAN	code
90 cm inox		8051566437450	2513 090
120 cm inox		8051566437467	2513 020



Finish: satin stainless steel

Easy electronic control

Grease filter

90 cm hoods: 2 filters

120 cm hood: 4 filters

4 speeds

LED stripe illumination

Automatic delayed shutdown


Perimetric aspiration

Optional filtering operation mode

Air flow rate: **800 m³/h**

Air exhaust hole: Ø 120/150 mm

Motor power: 200 W

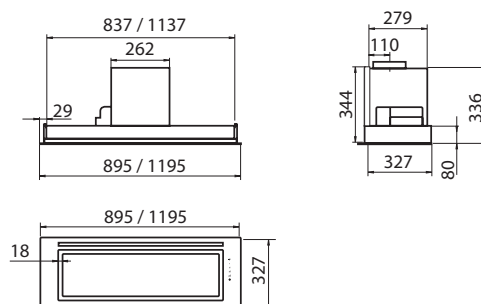

accessories	EAN	code
carbon filter	8051566437672	9700 600
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

The hood is to be fixed to the shoulders of the hanging cabinet.

Flat NEW

Flat white

under-cabinet built-in suction hood



Finish: white glass

Touch control

Grease filter

60 cm hoods: 1 filter

90 cm hoods: 2 filters

120 cm hood: 4 filters

4 speeds

LED stripe illumination

Automatic delayed shutdown

Perimetric aspiration

Optional filtering operation mode


Air flow rate: **800 m³/h**

Air exhaust hole: Ø 120/150 mm

Motor power: 200 W

accessories	EAN	code
carbon filter	8051566437672	9700 600
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model	EAN	code
60 cm white	8051566437405	2513 160
90 cm white	8051566437412	2513 190
120 cm white	8051566437429	2513 120

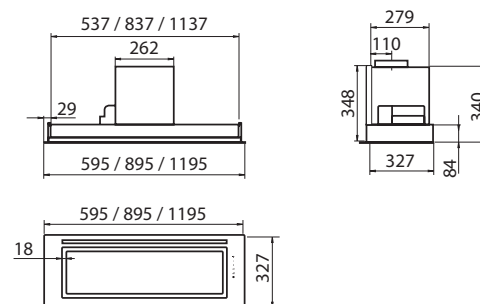

The hood is to be fixed to the shoulders of the hanging cabinet.

Flat black

under-cabinet built-in suction hood



Finish: black glass

Touch control

Grease filter

90 cm hoods: 2 filters

120 cm hood: 4 filters

4 speeds

LED stripe illumination

Automatic delayed shutdown

Perimetric aspiration

Optional filtering operation mode


Air flow rate: **800 m³/h**

Air exhaust hole: Ø 120/150 mm

Motor power: 200 W

accessories	EAN	code
carbon filter	8051566437672	9700 600
silencing kit Ø 120	8051566437658	9700 602
silencing kit Ø 150	8051566437665	9700 603

model	EAN	code
90 cm black	8051566437436	2513 690
120 cm black	8051566437443	2513 620

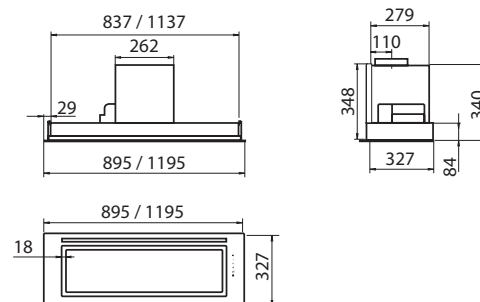

The hood is to be fixed to the shoulders of the hanging cabinet.